



## Oketo LED Pendant OTP Series

### Features

This pendant utilizes LED low voltage technology in various length metal cylinders. Cylinder is 2" in diameter and is available in several color choices. Light engine includes LED module rated at 50,000 hours. Pendant is suspended from 9' cable that can be cut to height and retained with a set screw and strain relief bushing. Product can be used over receptions desks, restaurants, and in any task lighting application. Driver is located in the canopy which mounts to standard junction box (not included).

### Construction

Pendant is supported with a 1/8" IP threaded stem and jam nut. Metal tube is made from 1/8" thick aluminum. Canopy is  $\phi 5-1/2"$  x 1-1/2" deep and fits over a standard junction box. Canopy is retained to the junction box from the inside with 2 mounting screws and the cover is retained with a strain relief. Power supply connections must be made inside a junction box (not included).

### Finish

All exposed metal parts are powder coat paint finish to color; black, silver or white.

### Electrical

Input 120-277 VAC 60 HZ.  
Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers. TRIAC and ELV dimming only at 120VAC.

### LED


Integrated LED modules capable of producing:  
12W, 780 source lumens  
3000K (CCT). Rated for 50,000 Hrs. 90 CRI.

### Certification

All fixtures are cETLus listed for damp locations.

**Specifications and dimensions**  
subject to change without notice.

LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

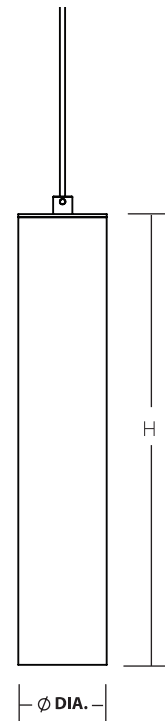

## Ordering Information:

Black	Silver	White	LED	Source Lumens	CCT	DIA.	H
OTP021207L30UDBK	OTP021207L30UDSL	OTP021207L30UDWH	12W	780	3000K	2"	12"