



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

## Standard Striplight ST

### Features

Functional and multi-purpose standard 1 or 2 light strip channel provides general illumination for indoor and damp applications. Product features include snap assembly of ends, socket bars and wire way cover and requires no tools. Fixture can be mounted individually or in continuous rows for surface or suspended mounting. Applications include light commercial, industrial, retail, coves and displays.



### Construction

Heavy-duty channel is die-formed from 22-gauge steel. Channel cover snaps to housing for easy access to wire way. Electrical connections are made inside the wire way. Standard mounting holes and wiring knockouts are included.

### Finish

Housing is finished in lighting grade white baked gloss enamel paint.

### Diffuser

No diffuser for this fixture. Fluorescent lamps are exposed.

### Electrical

This unit can be ordered in the following options: with UL listed instant-start, electronic high power factor ballast; 120V 60Hz AC (E8 suffix), 120-277 Universal 50/60Hz AC (MV suffix). R8 model number suffix designates normal power factor, 120V, residential grade ballast.

### Lamping

For use with T8 fluorescent linear lamps; not included.

### Certification


All fixtures are cULus listed for damp location. ENERGY STAR® qualified with R8, E8 only

### Options (consult factory)

- Reflectors
- Fusing
- Dimming
- Emergency battery back-up

For photometric information, consult factory.

Specifications and dimensions  
subject to change without notice.

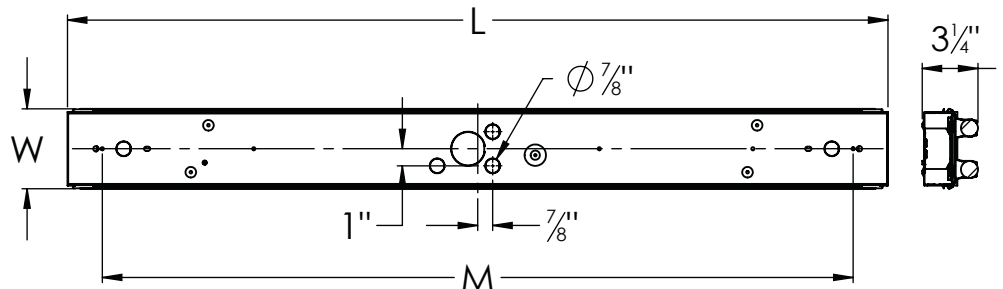

## Ordering Information:

Model No.	120V	120-277V	Lamps		Dimensions			Mounting
			Qty	Type	L	W	D	M
ST115R8			1	F15T8	18"	3-1/8"	3-1/4"	14-1/4"
ST117R8		ST117MV	1	F17T8	24"	3-1/8"	3-1/4"	20-1/4"
ST125R8		ST125MV	1	F25T8	36"	3-1/8"	3-1/4"	32-1/4"
ST132R8		ST132MV	1	F32T8	48"	3-1/8"	3-1/4"	44-1/4"
ST217R8		ST217MV	2	F17T8	24"	4-3/4"	3-1/4"	20"
ST225R8		ST225MV	2	F25T8	36"	4-3/4"	3-1/4"	32"
ST232R8		ST232MV	2	F32T8	48"	4-3/4"	3-1/4"	44"
ST232E8 (commercial)			2	F32T8	48"	4-3/4"	3-1/4"	44"
		ST232-8MV	4	F32T8	96"	4-3/4"	3-1/4"	92"