


CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS



Crystorama.com

ASSEMBLY INSTRUCTION MODEL #ARC-1929-GA-CL-MWP

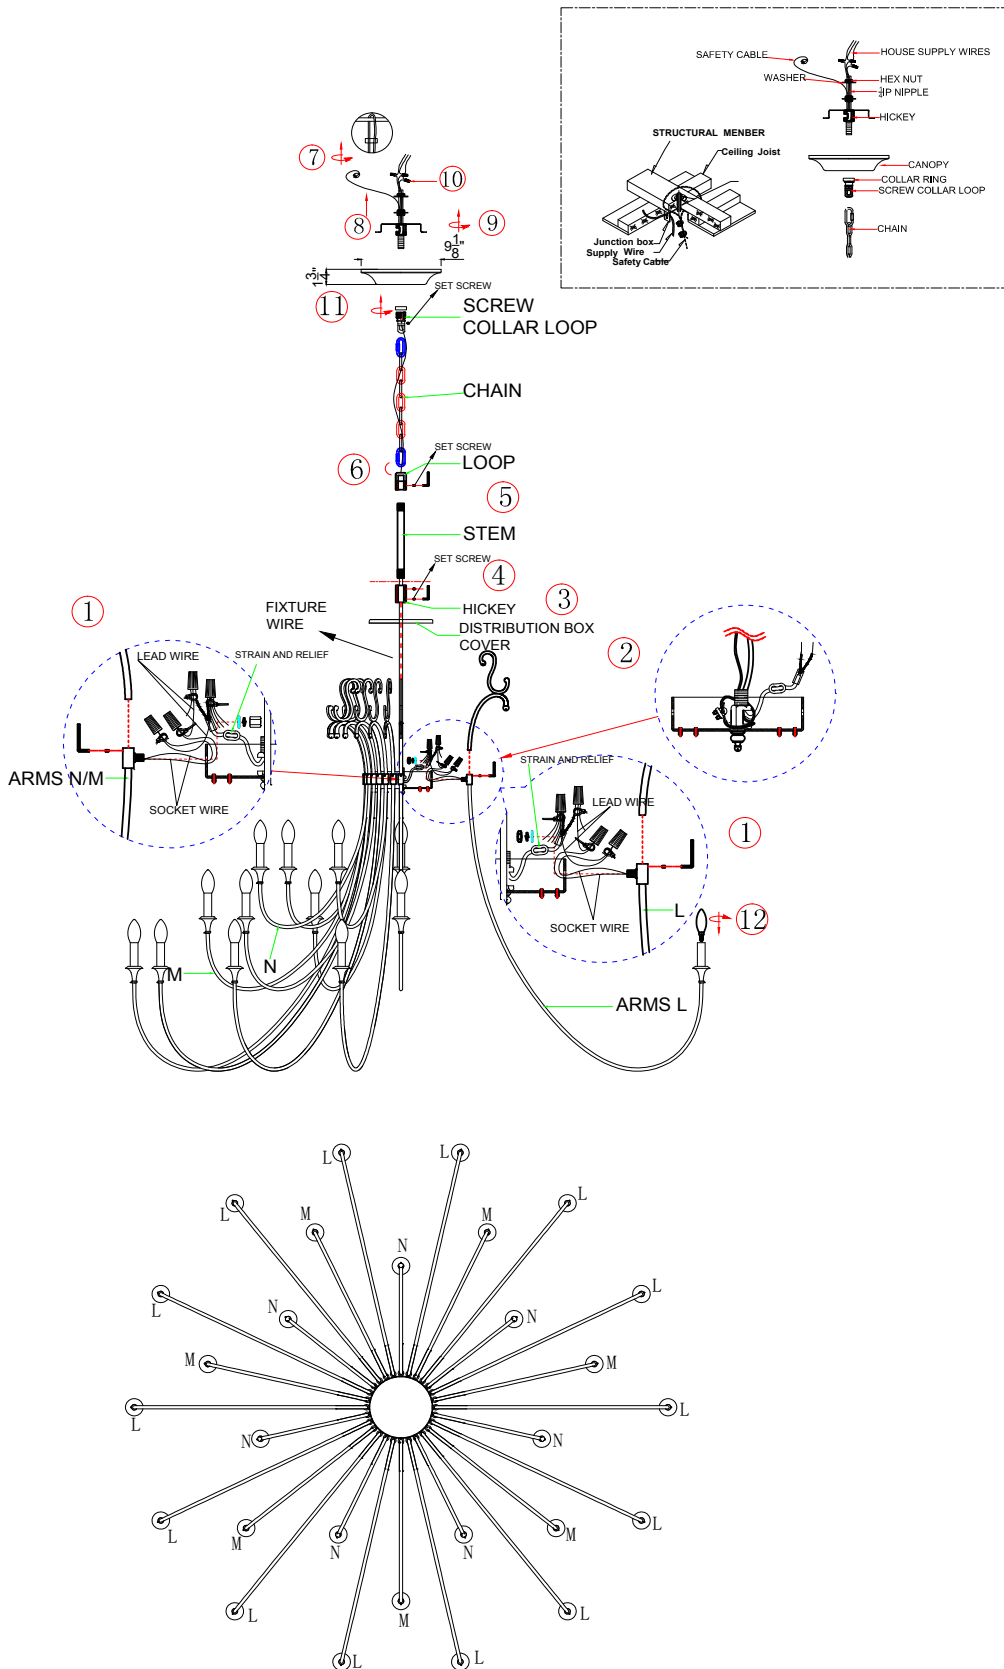

WARNING:

Electrical Danger Turn Power Off

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.



You will need 28 Candelabra Base Bulb 40 Watts Recommended 60 Watts Max. USE LED BULBS FOR EXTENDED USE(This fixture is Dry rated)

How to Install

1. Please place the fixture parts on a soft-cloth covered platform before installation. Do not remove the packaging on the arms until after installation is completed.
2. Assemble the Top and Middle and Bottom arms on the top distributor box. When assembling the top and middle arms, please use the thicker nut. Use the thin nut for the bottom arms only. The bare grounding wire is supposed to be attached onto one of the arms. Please feed the grounding wire through the hole on the hickey and exit out of the distributor box.
3. For the hot socket wires, connect 5pcs of socket wires and 1pc of lead wire together and cap them with wire nuts. Repeat this step for the rest of the socket wires.
4. Follow step #3 for connecting the neutral socket wires.
5. Feed the fixture wire and the safety cable through the top stem, distributor box cover into the hickey. Exit them out through the hole on the side of hickey, feed the safety cable through the lock and coil it around the hickey, then feed the cable through the lock again and tighten it with lock screw.
6. Connect the fixture wire with the lead wires from step #3 and #4 by wire nuts
7. Carefully push all wires and wire nuts into distributor box. Place the top cover over the top distributor box and secure with the coupling. Screw the stem onto the coupling and loop onto the stem. Insert a scroll onto the top of each arm and secure using the provided screw and wench.
8. Attach one end of the 1/4 IPS threaded pipe provided onto the ceiling joist and secure with hex nut. The other end should protrude through the outlet box as shown.
9. Assemble the screw collar loop, nipple hex nut and hickey to the 1/4 IPS threaded pipe and adjust overall length to allow the collar ring to hold the canopy flush to ceiling.
10. Attach one end of the chain to the fixture loop by opening the quick link. Slide the screw collar ring over the upper end of the chain and through the canopy. Open the opposite quick link and lift the fixture to attach the screw collar loop to the quick link. Secure the link.
11. Feed the fixture wires, ground wires and safety cable through the chain and screw collar loop, exiting through the Hickey. Proceed with the wire connections. Wrap the safety cable around the ceiling joist and secure the cable with the clamp and set screws provided as shown. After wires are connected, thread the screw collar loop onto the nipple. Place the canopy up against the ceiling and lock by tightening the screw collar loop ring.
12. After safely attaching fixture into junction box, install bulbs and proceed to connecting the power.
13. When you begin to dress the fixture, start with package labeled (A).

IMPORTANT: Apply crystal sets in alphabetical order.
⚠️ WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov

CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS





Crystorama.com

ASSEMBLY INSTRUCTION MODEL #ARC-1929-GA-CL-MWP

Crystal Sets

- A. 28sets 2 *14mm
- B. 28sets 3 *14mm + 1*76mm drop
- C. 7sets 39*14mm
- D. 7sets 23*14mm
- E. 7sets 54*14mm
- F. 7sets 29*14mm
- G. 14sets 76*14mm
- H. 14sets 31*14mm
- I. 1set 38*14mm+1*76mm drop
- J. 1set 40*14mm+1*76mm drop
- K. 1set 42*14mm+1*76mm drop
- L. 1set 44*14mm+1*76mm drop
- M. 1set 46*14mm+1*76mm drop
- N. 1set 48*14mm+1*76mm drop
- O. 1set 50*14mm+1*76mm drop
- P. 1set 52*14mm+1*76mm drop
- Q. 1set 54*14mm+1*76mm drop
- R. 1set 56*14mm+1*76mm drop
- S. 1set 58*14mm+1*76mm drop
- T. 1set 60*14mm+1*76mm drop
- U. 1set 62*14mm+1*76mm drop

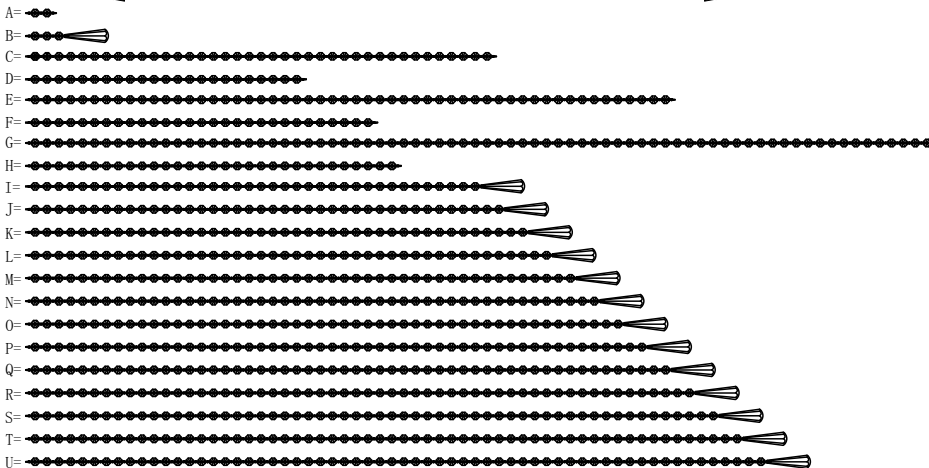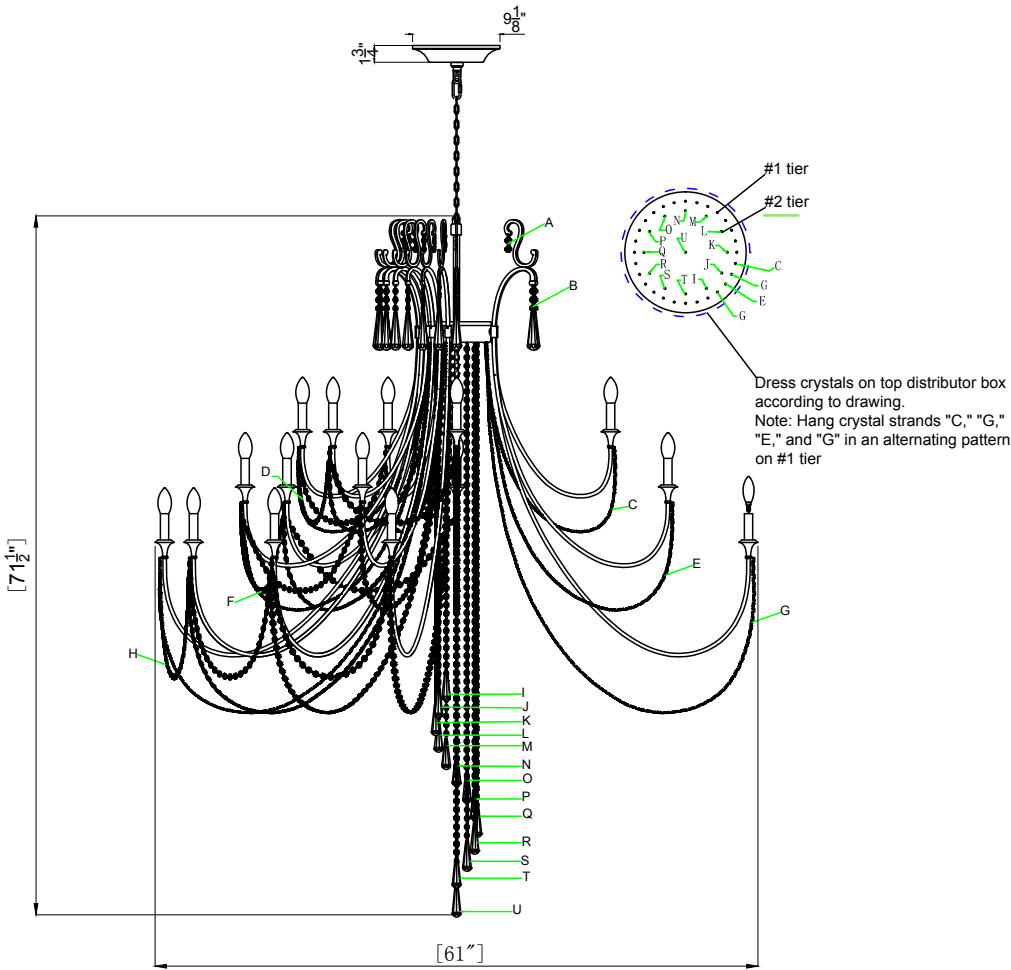

CRYSTORAMA

LIGHTING THE WAY FOR SIXTY YEARS



Crystorama.com

PART NUMBER MODEL #ARC-1929-GA-CL-MWP

Part Number

Part Numbers

- A. (1)-Mounting Hardware
- B. (1)-Steel wire L177"
- C. (1)-Screw Collar Loop
- D. (1)-Canopy;ø9*H1 3/4"
(XBN1929GACAN9IN)
- E. (1)-Screw Collar Loop Ring
- F. (1)-Chain;ø1/5*120"
(XBN1917GACHA5MM)
- G. (1)-Fixture Loop;M19*M4
- H. (1)-Top Stem;L8 3/5"
(XBN1929GATSTEM8.6IN)
- I. (1)-Finial;H1 1/5"
(XBN1917GAFIN)
- J. (28)-Candle Sleeve;L2 4/5"
(XBN1919GACDL2.8IN)
- K. (1) -Top cover D7.28"
- L. (14) -Bottom arm
- M.(7)-Middle arm
- N.(7)-Top arm
- O.(1)-Coupling D1.18*1.96"
- P.(28)-Scroll

