

# INSTALLATION & ASSEMBLY INSTRUCTIONS

## 2786/2789 TOWEL SHELF WITH 2 BARS



### Part I Installation of Towel Shelf item onto Wall

#### 1. Installation of Wall Flanges (A & B) on Walls with Wood Studs or Backing.

- (a) Position one of the wall flanges (**A**) vertically on the wall at the desired height, using a level (to make sure that the wall flange is straight). Mark hole locations with nail or punch in centers of projecting fittings (**C**). *(see figure 1)*
- (b) Position the other wall flange (**B**) vertically on the wall (see figure 1 for your center to center distance from wall flange A). Use a level to make sure that the wall flange is straight and that both wall flanges align horizontally with each other. Mark hole locations with nail or punch in centers of projecting fittings (**C**). *(see figure 1)*
- (c) After hole locations are marked, remove wall flanges and drill 5/32" holes into studs or backing.
- (d) Mount wall flanges with #10 x 1 1/2" screws provided. Make sure that set screw holes on the projecting fittings (c) are facing down.

#### 2. Installation of Wall Flanges (A & B) on Drywall.

- (a) Same as #1 (a,b).
- (b) After hole location are marked, remove wall flanges and drill 1/2" holes.
- (c) Mount with 3/16" x 3" toggle bolts provided. Make sure that set screw holes on the projecting fittings (c) are facing down.

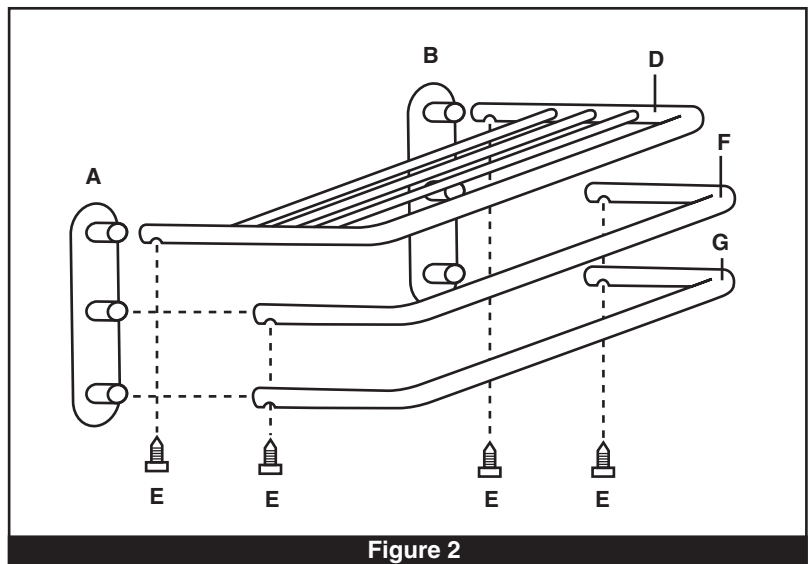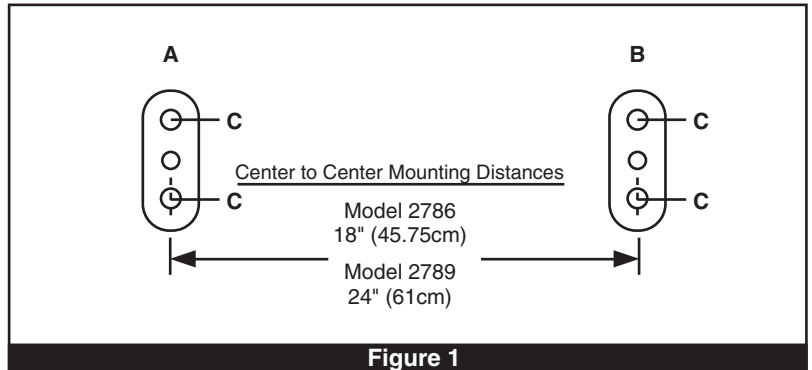

### Part II Assembly of Towel Shelf and 2 Bars onto Wall Flanges

**IMPORTANT: Shelf and bars must be mounted on fittings in specified order below.**

1. Mount towel shelf (**D**) by sliding open ends of tubing onto the top 2 projecting fittings (c) on wall flanges (A and B). Secure towel shelf by inserting set screws (**E**) through the holes in the underside of the towel shelf near the wall flange and fasten set screws until the screw heads are flush. *(see figure 2)*
2. Mount medium size towel bar (**F**) below towel shelf in the same way as in stop number 1. *(see figure 2)*
3. Mount the small size towel bar (**G**) below medium towel bar onto the bottom 2 fitting of flange A & B, same way as in stop number 1.

#### **IMPORTANT:**

To prolong the life of this product, clean regularly with a soft damp cloth. **Do Not Use** detergents or cleansers as they may be harmful to finish.

#### **REQUIRED TOOLS:**

24" General Purpose Level. Standard size phillips head screwdriver  
Standard size slotted screwdriver required for installation of toggle bolts in drywall.

Liberty Hardware® Manufacturing Corporation  
140 Business Park Drive Winston-Salem, NC 27107  
www.libertyhardware.com  
©2007 LHMC, A Masco Company

Made in - Fabriqué en - Hecho en China