



ASSEMBLING & INSTALLATION INSTRUCTIONS

The drawing shown may not exactly match the product enclosed.
However, the installation instructions do apply to this product.

52109

- ◆ **WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**
- ◆ **ATTENTION! COUPER LE COURANT AU FUSIBLE OU UN DISJONCTEUR.**

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Junction Box. **The junction box is not include.**
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Thread nipple (C) into loop (F) until snug. Thread other end of nipple (C) with loop attached into single bar (D) until snug. Place lock washer (B) over end of nipple protruding through single bar and thread hex nut (A) onto nipple until tight. Take this single bar assembly and mount to ceiling junction box with junction box screws (E). Tighten screws securely with screwdriver.
4. Attach the pipe thread(N) to the center coupling of the lamp body(S), by turn it clockwise until tighten. Attach the tube(Q)/cover(P) insert the pipe thread, lock them securely with the round nut(O). Slide the electrical wires through the tubes(M)/(L)/(K) , loop(J), loop collar(H) , loop(F)and canopy(G).
5. Raise the tube(M) to top pipe thread of lamp body(S), raise the tube (L), tube (K) and loop(J) to the pipe thread in order, then by turning it clockwise until tight. Open the link(I), hooked the loop(F) and loop (J), close the link(I).
6. While holding the fixture lamp towards the ceiling , connect the electrical wires as Shown in **Fig.2**, making sure that all wire nuts are secured. You may have to wrap the connections with electrical tape. If your outlet has a ground wire (green or bare copper), connect the fixture ground wire to it. Otherwise connect fixture's ground wire directly to the Mounting plate with the green screw provided. After wires are connected, tuck them carefully inside the Junction box.
7. Install the light bulbs(not included) in accordance with the fixture specifications. **NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE!**
8. Raise the canopy on to the Junction box, lock it securely with the loop collar(H). Attach the glass(R) insert to the lamp holder, rotate the glass until tighten.

Your installation is now complete. Return power to the junction box the fixture.

FIG.1

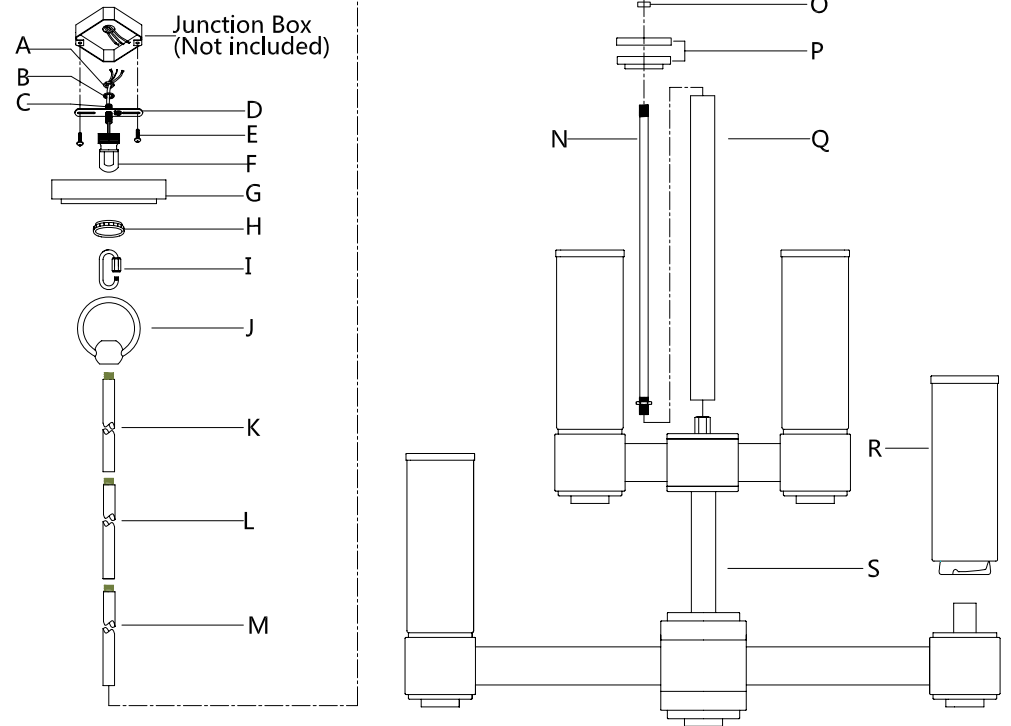


FIG.2

FIXTURE WIRES
Black or Smooth

HOUSE WIRES
Black(Hot)

FIXTURE WIRES
White or Ribbed

HOUSE WIRES
White (Neutral)

FIXTURE WIRES
Bare Copper (Ground)

HOUSE WIRES
Green or Bare Copper(Ground)

Thank you for purchasing a **LIVEX** product.

Need assistance with parts or assembly? Please call customer service at: **800-761-8056**

Or visit us online at: WWW.LIVEXLIGHTING.COM