

shown in Brushed Nickel  
with metal blades and  
decorative guard

shown in Textured Bronze  
with metal blades





# Acqua

Designed in 2008






shown in Textured Bronze  
with wood blades

	Safety cage compatible
	Proudly assembled with U.S. labor.

The Acqua 360° rotational fan is thoughtfully designed to resemble the molecular structure of water, Earth's most precious resource. The Acqua offers fluid lines and quiet axial rotation. The fan heads can be infinitely positioned in 180-degree arcs for optimum air movement; the greater the angles of the motors to the horizontal support rods (up or down), the faster the axial rotation. A slow, controlled axial rotation is achieved by both fan head position and fan blade speed. Matthews rotational fans circulate heat and air-conditioning more efficiently than traditional paddle fans. Constructed of cast aluminum and heavy stamped steel, the Acqua carries a limited lifetime warranty.

SKU NAMING CONVENTION	
SKU#	<b>AQ-XX-XXX</b> (Model+Finish+Blade Type)
Finishes	Brushed Nickel - <b>BN</b> Textured Bronze - <b>TB</b>
Blade Type	Solid Wood - <b>WD</b> Metal w/ Decorative Cage - <b>MTL</b> Metal w/ Safety Cage - <b>MSAF</b>

STANDARD EQUIPMENT	
One downrod of 10 inches / 13 cm	
Vaulted ceiling canopy for up to 29°	
3-speed RF remote control in black	ACCESSORY
	Decora-style, 3-speed, non-dimmable wall control 

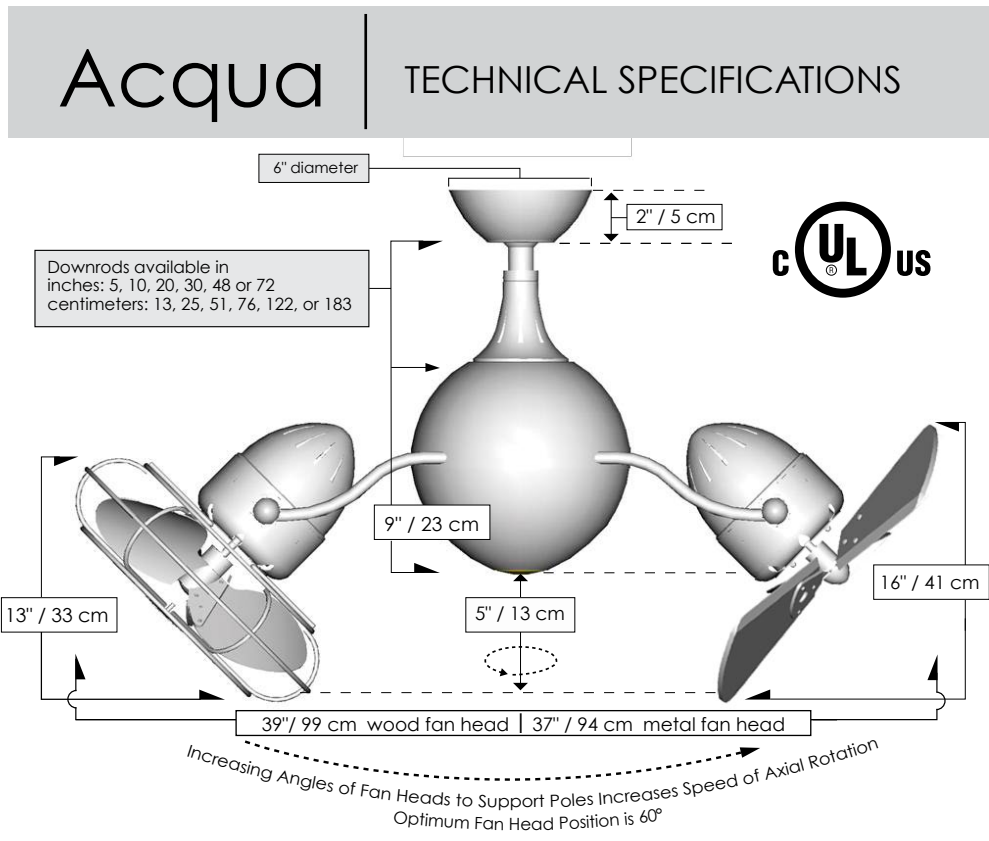

CEILING HEIGHT / DOWNROD TABLE	
Ceiling Height	Downrod Lengths <i>Field cuttable. Non-threaded</i>
10 ft or less	5 inches / 13 cm <i>Use safety cages if applicable</i>
10 -12 feet	10 inches / 25 cm
13 feet	20 inches / 51 cm
14 feet	30 inches / 76 cm
15 feet	48 inches / 122 cm
16 feet +	72 inches / 183 cm

CEILING PITCH TABLE	
0/12	0 degrees
1/12	4.76 degrees
2/12	9.46 degrees
3/12	14.04 degrees
4/12	18.43 degrees
5/12	22.62 degrees
6/12	26.57 degrees
7/12	30.26 degrees
8/12	33.69 degrees
9/12	36.87 degrees
10/12	39.81 degrees
11/12	42.51 degrees

FAN SPECIFICATIONS	
Fan Weight	27 lbs
Voltage	110 or 220
Motor Type	AC
Downrods Lengths <i>Field cuttable. Non-threaded</i>	inches: 5, 10, 20, 30, 48, 72 centimeters: 13, 25, 51, 76, 122, 183
Downrod Diameter	1 inch
Overall Drop	16 inches / 41 cm + downrod length
Environment	Damp locations for all finishes Neither coastal, saltwater nor chlorine compatible
Ambience	Soothing White Noise
Safety Certification	UL / CUL
Warranty	Limited Lifetime

NEW JAN 21, 2020 DOE MOTOR EFFICIENCY DATA		
Fan Head Options	Mahogany Tone Solid Wood	Metal with guard
Fan Diameter	39 inches / 99 cm	37 inches / 94 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Safety Cage or Decorative Cage
RPM (Low / High)	721 / 1199	1040 / 1445
CFM (Low / High)	2750 / 4058	1825 / 3167
Watts (High)	101.25	80.50
CFM / Watt (High)	40.80	39.34
Blade Pitch	19°	31°

LIGHT KIT PHOTOMETRICS						
Lamping (Replaceable)	Remote Dimmable	Delivered Temperature in K	Delivered Lumens	CRI	Watts	Hours
GU10 LED	No	2969	337.30	94	5	36,000
Light kit longevity if used 6 Hours/Day: 16.5 Years						



Matthews Fan Company  
1881 Industrial Drive  
Libertyville, IL 60048  
Tele: 847.680.9043  
Fax: 847.680.8140  
www.matthewsfanco.com