

# Ellipse Ceiling Mount

## 3-354-xxx

oxygen

FIXTURE TYPE \_\_\_\_\_


LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-20 Polished Nickel



-15 Black



-24 Satin Nickel

Diffusers:




-1 White Opal Glass



-2 Matte White Acrylic

<b>LIGHT SOURCE</b>	1 x 6.1W LED, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	7.2W at 120V
<b>RATED LIFE</b>	60000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	2700K, 3500K, 4000K
<b>LUMEN OUTPUT</b>	Delivered: (-1) Glass: 176 lm (LM-79) (-2) Acrylic: 191 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V to 277V AC, 50/60Hz
<b>DRIVER OUTPUT</b>	180mA, 7.6W max power
<b>DIMMING</b>	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
<b>CONSTRUCTION</b>	Plated Steel and Acrylic /or Glass
<b>DIFFUSER</b>	(-1) White Opal Glass, (-2) Matte White Acrylic
<b>FINISHES</b>	Black (-15), Polished Nickel (-20), Satin Nickel (-24)
<b>MOUNTING</b>	4" Octagonal J-Box*, 4" Square J-Box* with a single device mud ring *Deep J-Box (Required to house driver)
<b>STANDARDS</b>	UL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

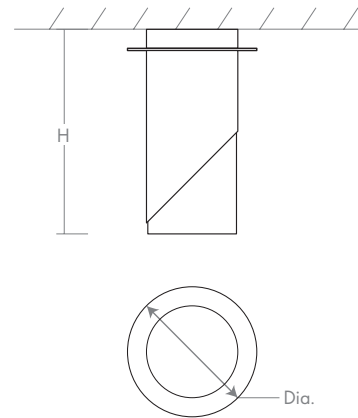

**DIMENSIONS**

<b>Dia.:</b>	<b>5.88"</b>
<b>H:</b>	<b>9.25"</b>
<b>Diffuser Dia.:</b>	<b>3.50"</b>
<b>M.C:</b>	<b>2.94"</b>

Order example for standard fixture:

**3-354-124** (x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)

**3:** 120V to 277V

Order example for optional color temperatures: **3-354-27124**

**27:** 2700K, **35:** 3500K, **40:** 4000K

