

GRATIS Pendant
3-609-xxx


oxygen

FIXTURE TYPE _____ LOCATION _____
 PROJECT _____ DATE _____



-14 Clear-Clear Glass/ Polished Chrome -124 Clear-Satin Opal Glass/ Satin Nickel -1414 Clear-Mirrored Glass/ Polished Chrome

LIGHT SOURCE 1 x 6.1W LED, 3000K, CRI 90
LUMINAIRE POWER 7.2W at 120V
RATED LIFE 60000 hr RL
OPTIONAL COLOR TEMPERATURES 2700K, 3500K, 4000K
LUMEN OUTPUT Delivered: 391 lm (LM-79)
INPUT VOLTAGE 120V to 277V AC, 50/60Hz
DRIVER OUTPUT 180mA, 7.6W max power
DIMMING TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
CONSTRUCTION Plated Steel and Glass
DIFFUSER/ METAL FINISHES (-14) Clear-Clear Glass/Polished Chrome
 (-124) Clear-Satin Opal Glass/Satin Nickel
 (-1414) Clear-Mirrored Glass/Polished Chrome
MOUNTING 4" Octagonal J-Box*, 4" Square J-Box* with a single device mud ring
 *Deep J-Box (Required to house driver)
STANDARDS UL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

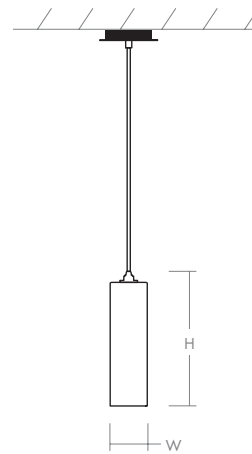

DIMENSIONS
Dia. Canopy: 5.88"
Dia. Fixture: 3.75"
H. Fixture: 15.50"
 Supplied with 10 ft braided cord

Order example for standard fixture:
3-609-1414 (x- Voltage - xxx-Sequence # - xx-Finish)
3: 120V to 277V
 Order example for optional color temperatures: **3-609-271414**
27: 2700K, **35:** 3500K, **40:** 4000K

