

The Arkay One LED bollard by Tech Lighting offers an understated, contemporary design that delivers beautifully controlled outdoor lighting while unobtrusively blending with surrounding architecture and landscape details. Wide Type II asymmetric light distribution is ideal for outdoor path and campus illumination. This timeless outdoor light fixture comes in two marine grade powder coat finishes: Bronze and Black.

- **Marine-grade powder coat finish and stainless steel hardware**
- **Options: GFCI outlet, Photo control, In-Line Fuse, Emergency Back-up**
- **Wet listed, IP65**

SPECIFICATIONS

DELIVERED LUMENS	900.8
WATTS	16.09
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
SECONDARY SURGE PROTECTOR	10kA
DIMMING	0-10, ELV, Triac
LIGHT DISTRIBUTION	Type II
MOUNTING OPTIONS**	Bolt
PERFORMANCE OPTIONS	GFCI/Photocontrol / In-Line Fuse/ Emergency Back-up
CCT	3000K or 4000K
CRI	80+
COLOR BINNING	3 Step
BUG RATING	B0-U2-G0
DARK SKY	Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Marine Grade Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years
WEIGHT	17 lbs



ARKAY 1 BOLLARD
shown in black



ARKAY 1 BOLLARD
shown in bronze




Shown with optional GFCI outlets

* Visit techlighting.com for specific warranty limitations and details.
**Bollard base not suitable for branch circuit through wiring.

ORDERING INFORMATION

SERIES	CRI/CCT	LENGTH	FINISH	VOLTAGE	OPTIONS
700BARK1	830 80 CRI, 3000K	36 36"	B BLACK	UNV 120V-277V	NONE
	840 80 CRI, 4000K		Z BRONZE		LF IN-LINE FUSE PC BUTTON PHOTOCONTROL EM EMERGENCY BACK-UP GC GFCI

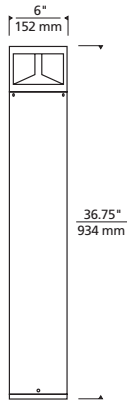


Arkay One Bollard

PHOTOMETRICS*

*For latest photometrics, please visit www.techlighting.com/OUTDOOR

ARKAY ONE BOLLARD

Total Lumen Output: 900.8
 Total Power: 16.09
 Luminaire Efficacy: 56
 Color Temp: 3111K
 CRI: 82.2
 BUG Rating: B0-U2-G0

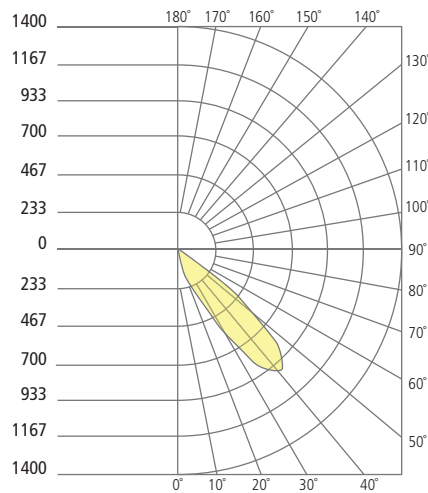

PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

