

WarmRain Specification for model:
WR 333-FF



Warm Rain models WR 333-FF Front-Fit™ remodeling showers fixtures are constructed of reinforced polyester resin covered with a high gloss gel-coat of 18 - 20 mil. thickness. The reinforced fiberglass has a minimum content of 18 % fiberglass.

The bottom base of the unit is constructed of 1/2" end-grained balsa wood sandwiched between 2 layers of reinforced fiberglass at a content of no less than 18%. The base is an integral part of the unit.

The inside bottom floor will be textured. The texture bottom floor meets and exceeds ASTM Safety Specification F-462.

The unit will measure 36" x 36.5" x 82.5" and have a 6" front outside threshold with a 2.75" inside dam.

The front apron of all units will have wood support along the entire length to help prevent the corners from chipping or bowing in or out.

The WR 333-FF Front-Fit™ showers will have wood support for a shower door and a curtain bracket.

These units have the option of being reinforced for the future installation of grab bars and the above floor rough-in.


These Warm Rain showers arrive on site fully tested, inspected, and certified to meet or exceed the precise standards established by FHA/HUD, materials bulletin 73, American National Standards Z-124.1 and Z-124.2, ASTM/E-84 and is certified by the National Association of Home Builders NAHB.



Warm Rain Corporation, P.O. Box 600, Hancock, MI 49930



Voice: 906-482-3750 Fax: 906-482-2585 email: tedk@warmrain.com website: www.warmrain.com

WarmRain Specification for model:
WR 333-FF



WR 333 FF

(Revised)

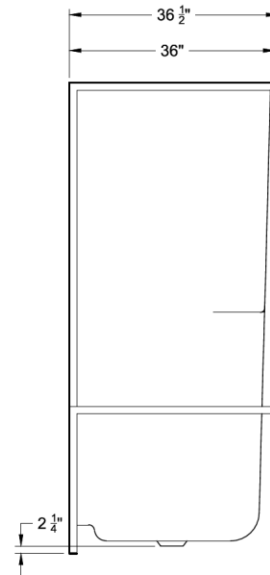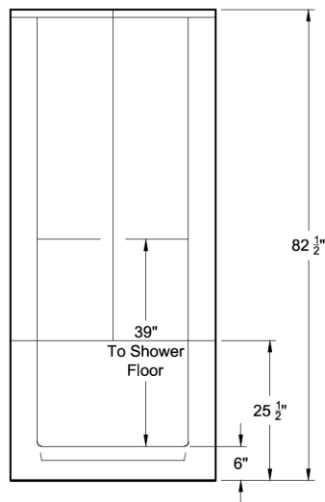

6-6-12

