### GENERATION LIGHTING

#### **POST**

#### **CAUTION - RISK OF FIRE**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

### **GENERAL PRODUCT INFORMATION:**

This product is safety listed for wet locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


This instruction shows a typical installation.

## GENERATION LIGHTING


7400 Linder Ave, Skokie, IL 160077 800.969.3347

## www.generationlighting.com

© 2020 Generation Lighting. All rights reserved. The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

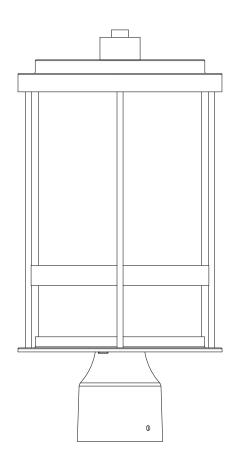

# **Install the Fixture**

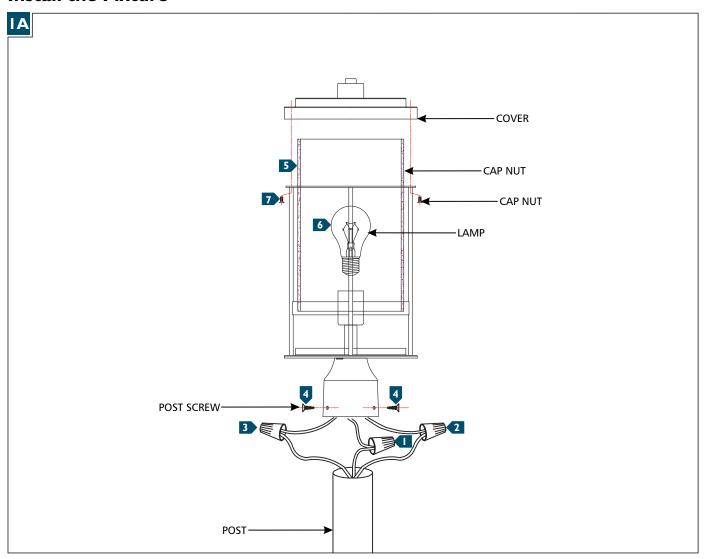

- Connect the fixture to a suitable ground in accordance to local electrical codes.
- 2 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 3 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 4 Neatly tuck in any wiring and secure the fixture to the post with post screws.
- **5** Gently insert the glass into the cage.
- Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.
- Place the cover onto the fixture and secure it with the provided screws.