





## ASSEMBLY INSTRUCTIONS

### Cord Mount Option 1

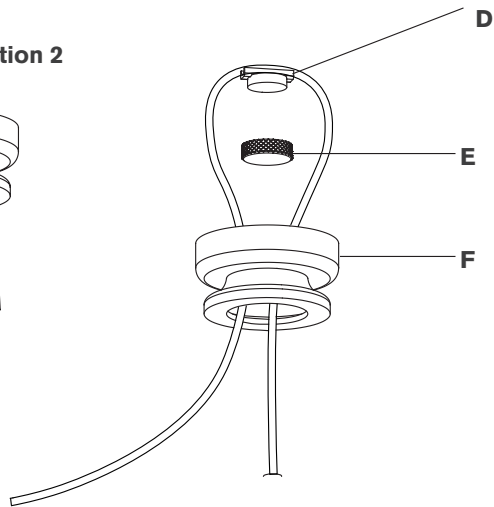

### Cord Mount Option 2



## Junio Cord Mount

Item # TOB 5645-PRT

### NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

### TOOLS REQUIRED (NOT INCLUDED):

Phillips Screwdriver	Slotted Screwdriver	Wire Cutters
Wire Strippers	Hammer	Pencil
Drill		

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Remove canopy (**F**) from mounting plate (**B**) by unscrewing, then remove collar ring (**E**) and wire mount (**D**) from mounting plate.
3. Using the mounting plate (**B**) as a guide, line up with the junction box and mark anchor positions.
4. Using a drill bit slightly smaller than the anchor, drill holes in the marked positions. Install anchors (**A**) into the holes using the hammer.
5. Install mounting plate (**B**) to ceiling and secure with wood screws (**C**) to anchors (**A**).
6. Place fixture wire on slot of wire mount (**D**), then pass through canopy (**F**) as shown in line diagram.
7. Adjust fixture wire to desired height, then install wire mount (**D**) to mounting plate (**B**) and secure with collar ring (**E**).
8. Thread canopy (**F**) to mounting plate (**B**).

**Care Instructions:** Clean only with a soft dry cloth or feather duster. Do Not use abrasive or chemical agents.